
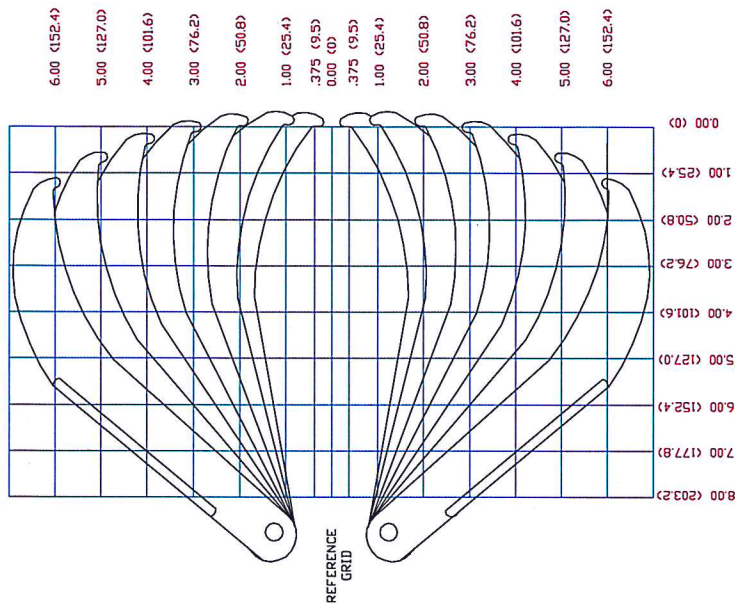


PHB-108/208 Standard Jaws

HYDRAULIC PULLER

Page 1 of 2

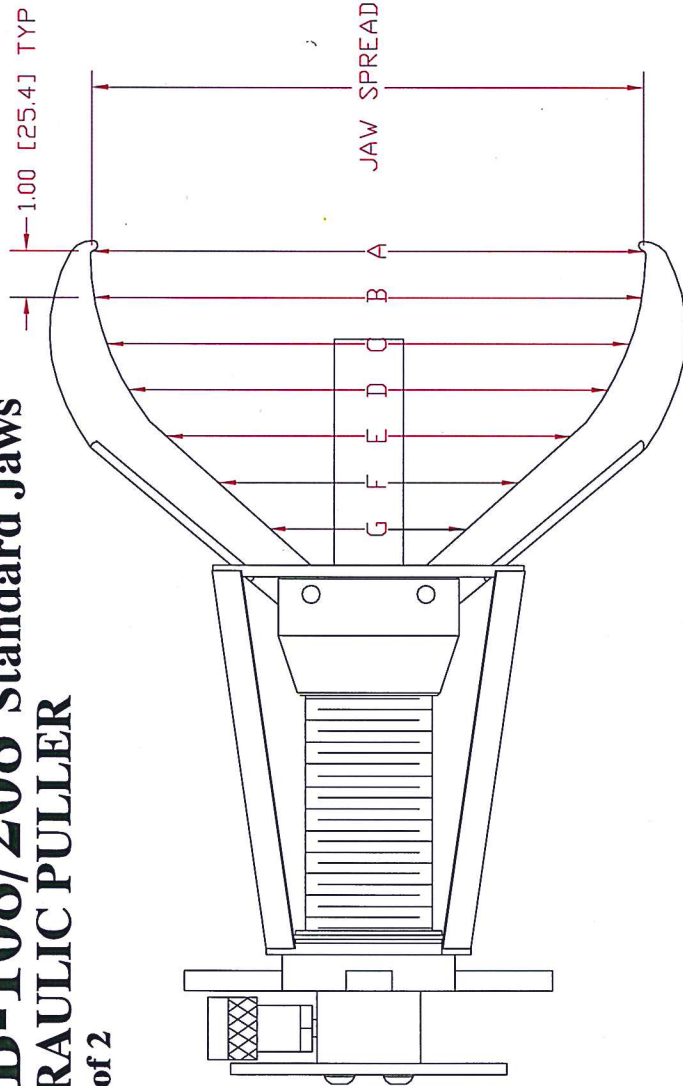

JAW SPREAD	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F
0.75 (19.0)	0.99 (25.1)	2.22 (56.3)	2.97 (75.4)	3.33 (84.5)	3.18 (80.7)	2.59 (65.7)
2.00 (50.8)	2.05 (52.1)	3.11 (78.9)	3.74 (94.9)	3.99 (101.3)	3.73 (94.7)	2.90 (73.6)
4.00 (101.6)	4.14 (105.1)	4.87 (123.6)	5.28 (134.1)	5.33 (135.3)	4.89 (124.2)	3.56 (90.4)
6.00 (152.4)	6.10 (154.9)	6.66 (169.1)	6.83 (173.4)	6.65 (168.9)	5.95 (151.1)	4.08 (103.6)
8.00 (203.2)	8.06 (204.7)	8.35 (212.0)	8.30 (210.8)	7.90 (200.6)	6.93 (176.0)	4.47 (113.7)
10.00 (254.0)	10.15 (257.8)	10.18 (258.5)	9.85 (250.1)	9.12 (231.6)	7.71 (195.8)	4.48 (113.7)
12.00 (304.8)	12.21 (310.1)	11.99 (304.5)	11.36 (288.5)	10.29 (261.3)	8.35 (212.0)	4.08 (103.6)

POSI LOCK MODELS PHB108/PHB208 GEAR AND BEARING PULLERS

MODEL PHB108

10 TON (9.3 METRIC TONS)
3 JAW - STANDARD
RAM STROKE 6.13 (155.7)
REACH 8.00 (203.2)
SPREAD .75 (19.0) TO 12.0 (304.8)
WT. 16.1 (7.30kg)
RATED FOR 10000 PSI

MODEL PHB208



10 TON (9.3 METRIC TONS)
2 JAW - STANDARD
RAM STROKE 6.13 (155.7)
REACH 8.00 (203.2)
SPREAD .75 (19.0) TO 12.0 (304.8)
WT. 14.1 (6.40kg)
RATED FOR 10000 PSI

PHB-108/208 Standard Jaws

HYDRAULIC PULLER



Page 2 of 2

RAM POINT
SET

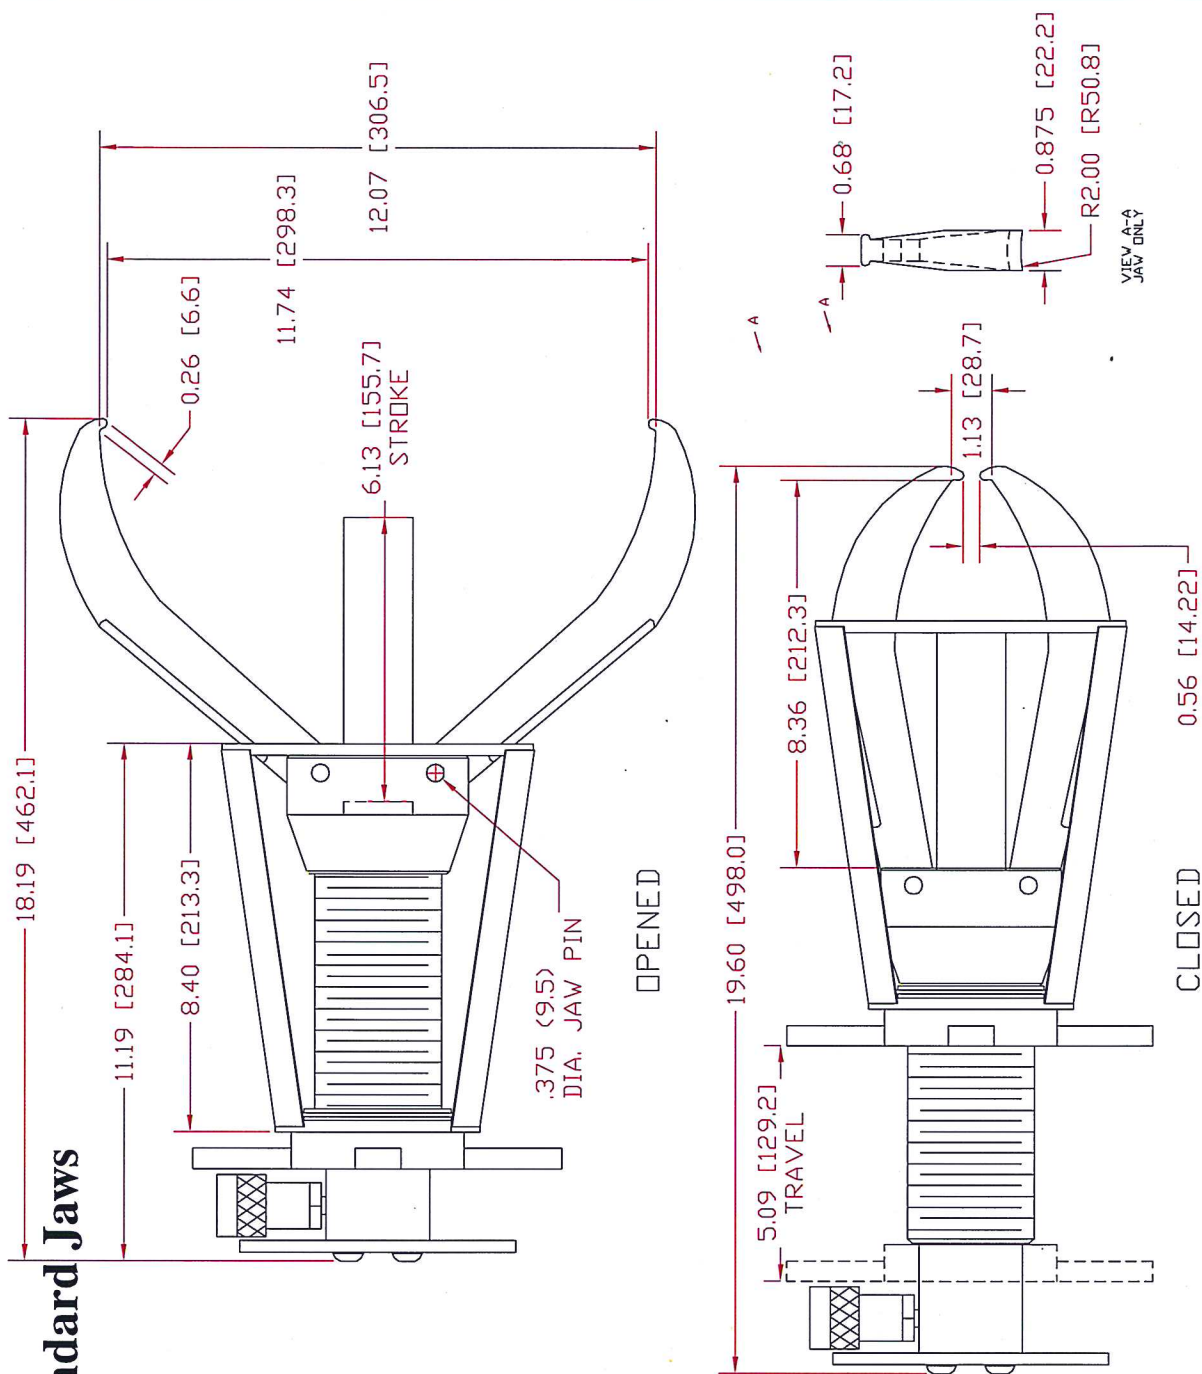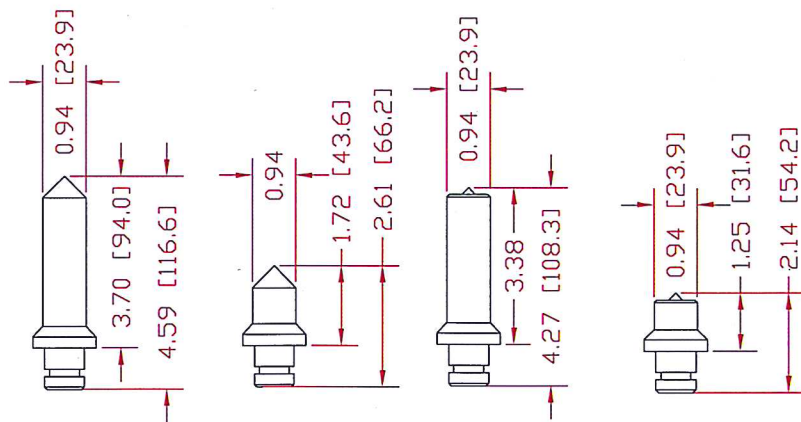

PHB-108/208 Long Jaws HYDRAULIC PULLER

Page 1 of 2

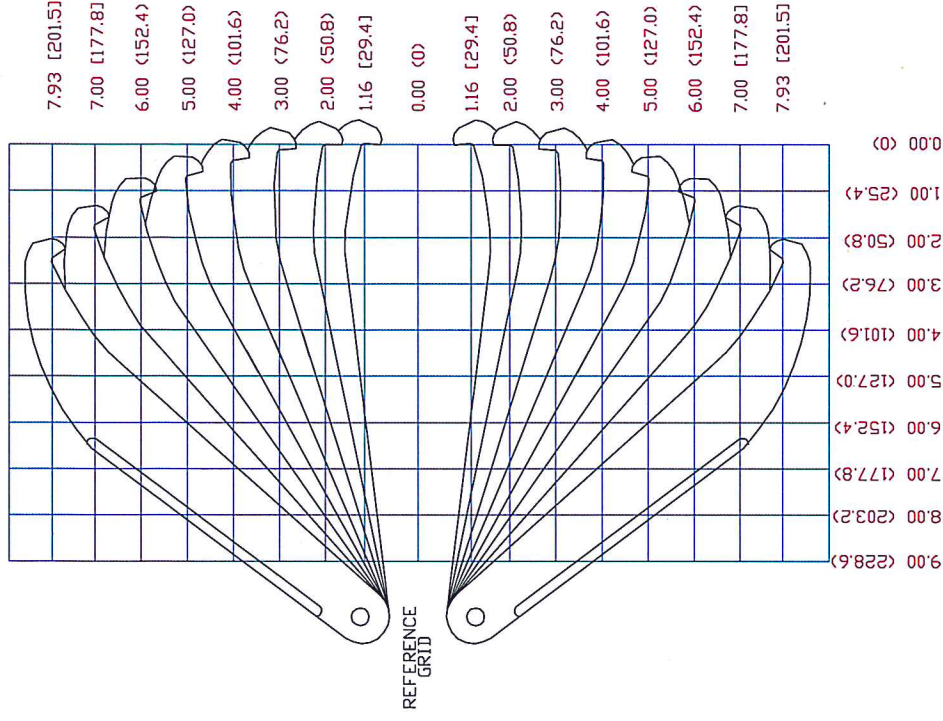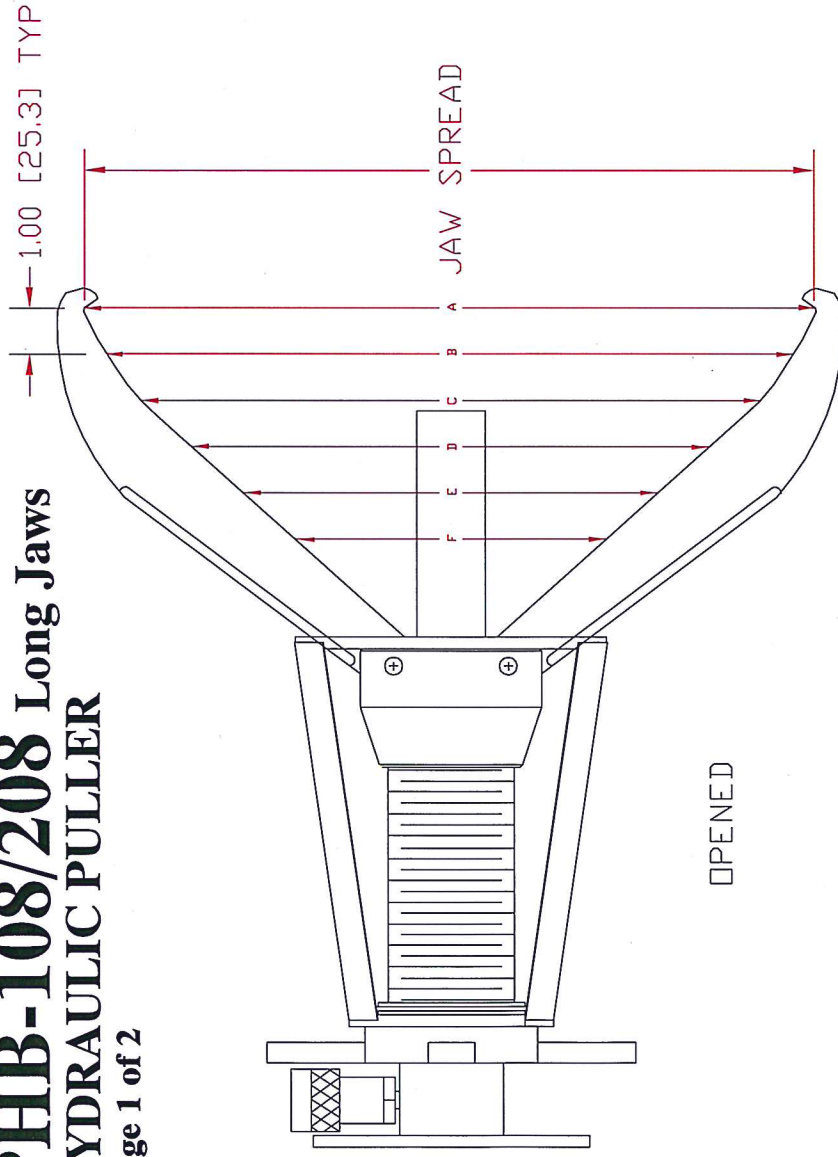

JAW SPREAD	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F
2.32 (58.9)	2.91 (73.8)	3.15 (80.0)	3.00 (76.2)	2.75 (69.9)	2.51 (63.7)	2.26 (57.5)
4.00 (101.6)	4.42 (112.2)	4.51 (114.4)	4.21 (106.8)	3.79 (96.3)	3.37 (85.7)	2.96 (75.1)
6.00 (152.4)	6.21 (157.7)	6.10 (155.0)	5.60 (142.2)	4.97 (126.3)	4.35 (110.4)	3.86 (98.1)
8.00 (203.2)	8.01 (203.5)	7.71 (195.9)	6.99 (177.3)	6.12 (155.6)	5.27 (133.8)	4.41 (112.1)
10.00 (254.0)	9.80 (248.9)	9.27 (235.4)	8.27 (210.2)	7.16 (182.0)	6.03 (153.1)	4.95 (125.6)
12.00 (304.8)	11.57 (293.9)	10.79 (274.0)	9.48 (240.8)	8.07 (205.0)	6.66 (169.1)	5.25 (133.3)
14.00 (355.6)	13.33 (338.5)	12.24 (310.9)	10.53 (267.5)	8.75 (222.1)	6.69 (176.8)	5.17 (131.4)
15.86 (402.8)	14.91 (378.8)	13.45 (341.7)	11.24 (285.5)	8.99 (228.4)	6.74 (171.2)	4.49 (114.1)

POSI LOCK MODELS PHB108/PHB208 GEAR AND BEARING PULLERS

MODEL PHB108


10 TON (9.3 METRIC TONS)
3 JAW - LONG JAWS
RAM STROKE 6.13 (155.7)
REACH 9.80 (248.9)
SPREAD 2.32 (58.9) TO 15.86 (402.8)
WT. 17.6 (7.99kg)
RATED FOR 10000 PSI

MODEL PHB208



10 TON (9.3 METRIC TONS)
2 JAW - LONG JAWS
RAM STROKE 6.0 (152.4)
REACH 9.80 (248.9)
SPREAD 2.32 (58.9) TO 15.86 (402.8)
WT. 15.1 (6.85kg)
RATED FOR 10000 PSI

PHB-108/208 Long Jaws HYDRAULIC PULLER

Page 2 of 2

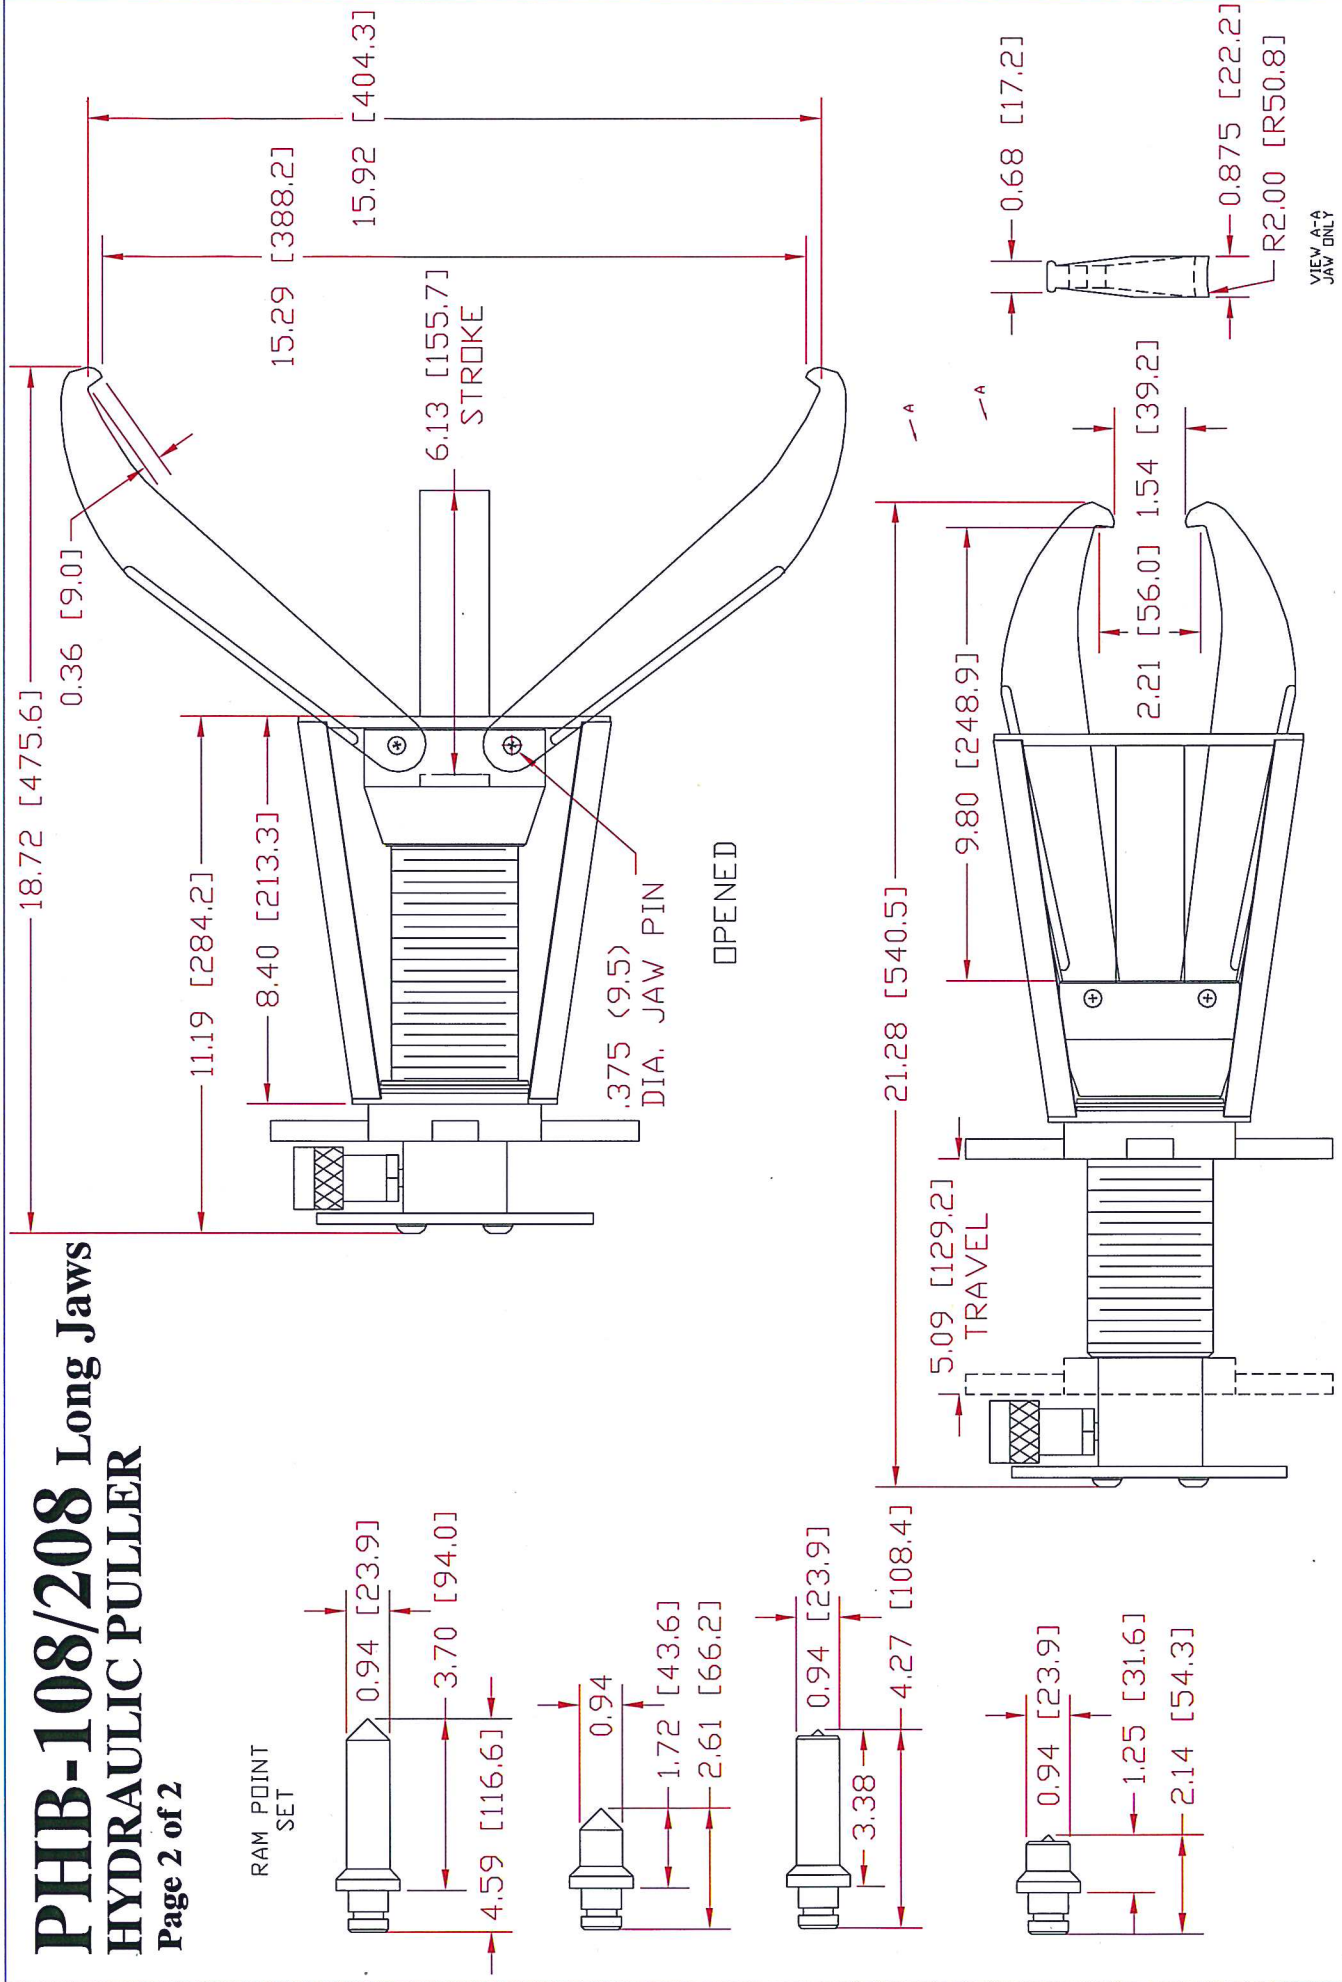

PHB-108/208 Extra Long Jaws
HYDRAULIC PULLER
Page 1 of 2

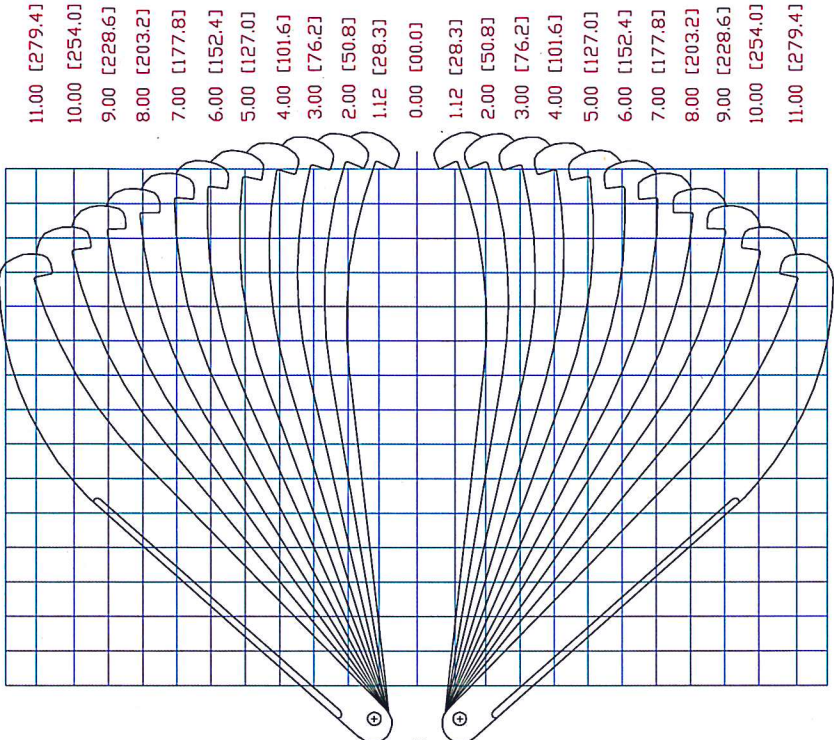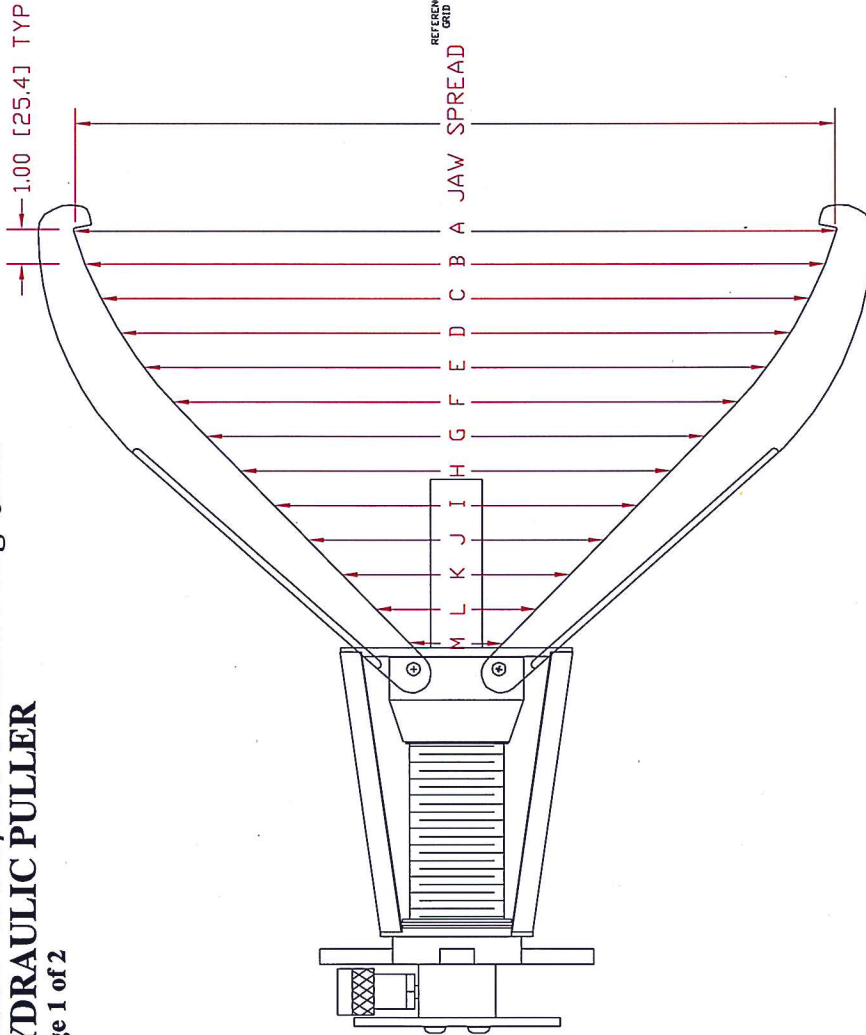

JAW SPREAD	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	DIM H	DIM J	DIM K	DIM L	DIM M
1.12 [28.4]	2.52 [64.0]	2.69 [68.3]	3.82 [97.5]	3.92 [99.6]	4.03 [102.4]	4.00 [101.6]	3.89 [98.8]	3.86 [98.0]	3.43 [87.1]	3.21 [81.5]	2.98 [75.7]	2.75 [69.9]
2.00 [50.8]	4.25 [108.0]	4.77 [121.2]	5.13 [130.3]	5.33 [135.4]	5.37 [136.4]	5.26 [133.6]	5.00 [127.0]	4.66 [118.4]	4.32 [109.7]	3.98 [101.1]	3.64 [92.5]	3.30 [83.8]
3.00 [76.2]	6.20 [157.5]	6.59 [167.4]	6.83 [173.5]	6.92 [175.8]	6.85 [174.0]	6.63 [168.4]	6.25 [158.8]	5.78 [146.8]	5.31 [134.8]	4.84 [122.9]	4.37 [111.0]	3.90 [99.1]
4.00 [101.6]	8.16 [207.3]	8.45 [214.6]	8.57 [217.7]	8.54 [216.9]	8.35 [212.1]	8.00 [203.2]	7.50 [190.5]	6.89 [175.0]	6.29 [159.8]	5.69 [144.5]	5.08 [129.0]	4.48 [113.8]
5.00 [127.0]	10.15 [257.9]	10.30 [261.6]	10.30 [261.6]	10.15 [257.9]	9.84 [249.9]	9.37 [238.0]	8.72 [221.5]	7.98 [202.7]	7.23 [183.6]	6.49 [164.8]	5.75 [146.1]	5.00 [127.0]
6.00 [152.4]	12.15 [308.6]	12.18 [309.4]	12.03 [305.6]	11.78 [299.2]	11.34 [288.0]	10.74 [272.8]	9.93 [252.2]	9.04 [229.6]	8.15 [207.0]	7.25 [184.2]	6.36 [161.5]	5.46 [138.7]
7.00 [177.8]	14.11 [358.4]	14.00 [355.6]	13.77 [349.8]	13.36 [339.3]	12.78 [324.6]	12.00 [304.8]	11.08 [281.4]	10.01 [252.7]	9.95 [252.7]	7.90 [200.7]	6.84 [173.7]	5.79 [147.1]
8.00 [203.2]	16.12 [409.4]	15.88 [403.4]	15.49 [393.4]	14.93 [379.2]	14.19 [360.4]	13.25 [336.6]	12.11 [307.6]	10.87 [276.1]	9.64 [244.9]	8.41 [213.6]	7.17 [182.1]	5.94 [150.9]
9.00 [228.6]	18.03 [458.0]	17.69 [449.3]	17.15 [435.6]	16.44 [417.6]	15.53 [394.5]	14.40 [365.8]	13.04 [331.2]	11.61 [294.9]	10.18 [258.6]	8.75 [222.3]	7.32 [185.9]	5.90 [149.9]
10.00 [254.0]	20.09 [510.3]	19.56 [496.8]	18.86 [479.0]	17.98 [456.7]	16.85 [428.0]	15.49 [393.4]	13.87 [352.3]	12.20 [309.9]	10.54 [267.7]	8.88 [225.6]	7.22 [184.2]	5.56 [141.2]
11.11 [282.2]	22.30 [566.4]	21.59 [548.4]	20.68 [525.3]	19.56 [498.8]	18.18 [461.8]	16.49 [418.8]	14.54 [369.3]	12.57 [319.3]	10.80 [269.2]	8.63 [219.2]	6.66 [169.2]	4.69 [119.1]

POSI LOCK MODELS PHB108/PHB208
GEAR AND BEARING PULLERS

MODEL PHB108	MODEL PHB208
10 TON (9.3 METRIC TONS)	10 TON (9.3 METRIC TONS)
3 JAW - EXTRA LONG JAWS	2 JAW - EXTRA LONG JAWS
RAM STROKE 6.13 (155.7)	RAM STROKE 6.13 (155.7)
REACH 8.00 (203.2)	REACH 8.00 (203.2)
SPREAD .75 (19.0 TO 12.0 (304.8)	SPREAD .75 (19.0 TO 12.0 (304.8)
W.T. 16.1 (7.30kg)	W.T. 14.1 (6.40kg)
RATED FOR 10000 PSI	RATED FOR 10000 PSI

PHB-108/208 Extra Long Jaws HYDRAULIC PULLER

Page 2 of 2

RAM POINT
SET

