
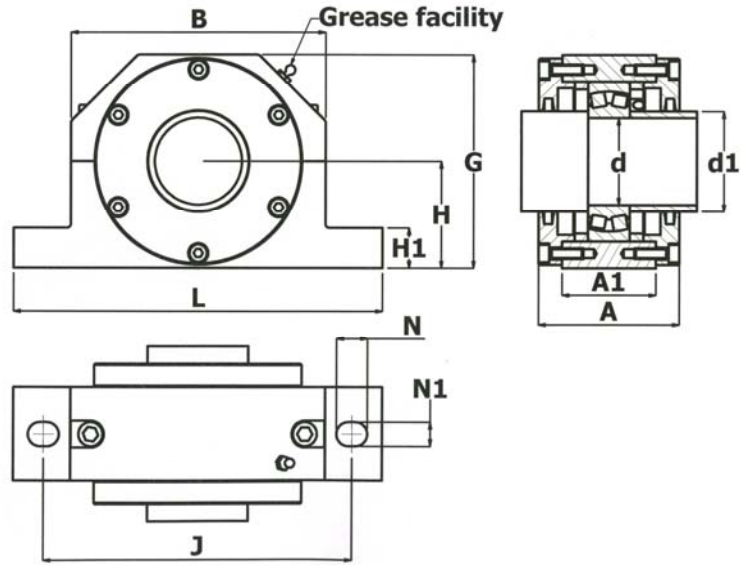


FLAME CUT STEEL BEARING HOUSINGS.

Fully interchangeable with SN style bearing housings.

End covers are not split on this unit. If fully split units are required see FC200SS series.

Can be 2 or 4 bolt. Ends can be milled for ease of assembly & repeatability.

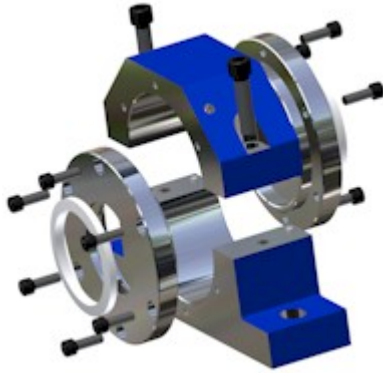

Machined to receive parallel bore spherical roller bearings. Can be machined for 2 or 4 bolt fixings.

BRG I/Dia (d)	Shaft Dia (d1)	Type	H	J	N1	N	A	L	A1	H1	B	G	Bearing	Locating Rings	
														N	Designation
50	60	FC 210S	60	170	15	20	90	205	60	25	120	116	1210	2	FRB 10.5/90
													2210	2	FRB 9/90
													22210C	2	FRB 9/90
55	65	FC 211S	70	210	18	23	90	255	60	28	160	140	1211	2	FRB 11.5/100
													2211	2	FRB 9.5/100
													22211C	2	FRB 9.5/100
60	70	FC 212S	70	210	18	23	95	255	65	30	170	140	1212	2	FRB 13/110
													2212	2	FRB 10/1110
													22212C	2	FRB 10/110
65	75	FC 213S	80	230	18	23	105	275	70	30	190	160	1213	2	FRB 14/120
													2213	2	FRB 10/120
													22213C	2	FRB 10/120
70	80	FC 215S	80	230	18	23	105	280	70	30	190	160	1215	2	FRB 15.5/130
													2215	2	FRB 12.5/130
													22215C	2	FRB 12.5/130
75	80	FC 216S	95	260	22	27	110	315	75	32	210	190	1216	2	FRB 16/140
													2216	2	FRB 12.5/140
													22216C	2	FRB 12.5/140
80	90	FC 217S	95	260	22	27	115	320	85	32	210	190	1217	2	FRB 16.5/150
													2217	2	FRB 12.5/150
													22217C	2	FRB 12.5/150
85	95	FC 218S	100	290	22	27	130	345	95	35	235	220	1218	2	FRB 17.5/160
													2218	2	FRB 12.5/160
													22218	2	FRB 12.5/160
100	115	FC 220S	112	320	26	32	145	380	105	40	260	222	1220	2	FRB 18/180
													2220	2	FRB 12/180
													22220C	2	FRB 12/180
110	125	FC 222S	125	350	26	32	155	410	110	45	290	250	1222	2	FRB 21/200
													2222	2	FRB 13.5/200
													22222C	2	FRB 13.5/200
120	135	FC 224S	140	350	26	32	170	410	120	45	120	280	22224C/W33	2	FRB 22/215
													23224C/W33	2	FRB 14/215
														2	FRB 10/215
130	145	FC 226S	150	380	28	35	180	445	130	50	320	300	22226C/W33	2	FRB 5/230
													23226C/W33	2	FRB 15/5/230
140	155	FC 228S	150	420	35	42	190	500	135	50	350	305	22228C/W33	2	FRB 15/250
													23228C/W33	2	FRB 5/250
150	165	FC 230S	160	450	35	42	200	530	145	60	370	325	22230C/W33	2	FRB 16.5/270
													23230C/W33	2	FRB 16.5/270
160	175	FC 232S	170	470	35	42	220	550	160	60	390	345	22232C/W33	2	FRB 17/290
													23232C/W33	2	FRB 5/290